



TASMAN

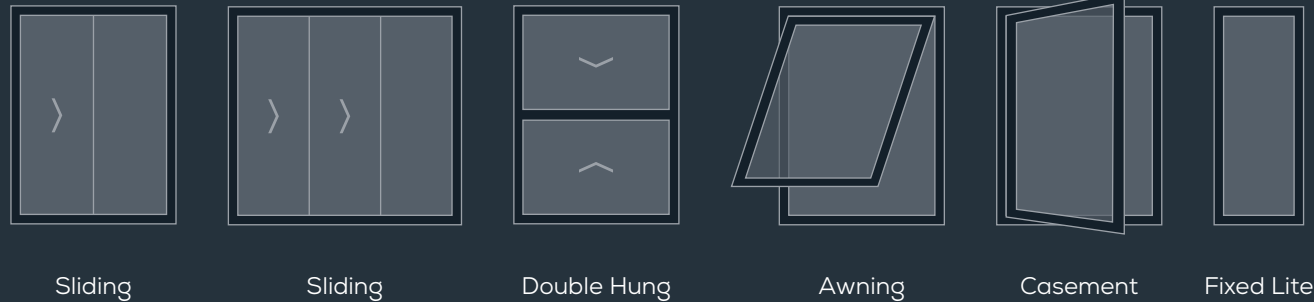
SIZE RANGE CATALOGUE

NEW SOUTH WALES



TASMAN
Windows & Doors

Design Styles WINDOWS AND DOORS



Sliding

Sliding

Double Hung

Awning

Casement

Fixed Lite



90° Bay Window

Transom Window

Louvre

Bi-fold

Hinged



135° Bay Window

Rake

Circle

Arch

Important Information

- All diagrams shown are viewed from the exterior.
- All measurements are in millimetres and are coded for ordering purposes.
- Height is always indicated first – sizes are finished sizes and do not include building-in fin.
- Please state left or right-hand opening as viewed from the exterior of the building when ordering.
- Timber reveal lining is available.
- Timber reveal lining is not fitted to the door sill.
- Building-in and prepared opening ties are available for both window and door products.
- All doors are fitted with safety glass and motif.
- Large windows may need motif. Confirm with a Bradnam's sales representative.
- Heavy duty sections may be used depending on the product size and required wind pressure.
- Non-standard sizes and configurations are available on request.

Colonial Bar Options



XO1218
Traditional Colonial

XO1218
Australian Colonial

XO1218
Highlander



XO1218
Traditional Federation



XO1218
Australian Federation

Product Care GUIDE

Maintenance of Powder Coated Aluminium Finishes

- In a rural atmosphere, cleaning may not be needed more frequently than every 6 months.
- In industrial and marine environments, more frequent cleaning (e.g. monthly, every 3 months is necessary).
- **It is critical** that non-abrasive mild detergent solution is used for cleaning.
- Add the non-abrasive mild detergent solution to a bucket of warm water.
- Wet a clean, soft rag then wipe the aluminium.
- Make sure that the surfaces are thoroughly rinsed after cleaning to remove all residues.

Maintenance of Window and Door Glass

- All glass surfaces should be kept clean by prompt removal of all dirt.
- Use clean water and soft, clean rag as buttons or grit can scratch the glass.
- In some instances, a small amount of mild detergent may be of some benefit. However, **DO NOT** use any form of abrasive cleaner or household cleaners.
- When using detergent make sure that the surfaces are rinsed well after cleaning to remove any detergent residue.

Special instructions for Solar Comfort glass, and other Low-E coated glass products

- The special coating on these types of glass is generally more difficult to clean.
- Use only soft, clean cloth, free from grit or buttons with a mild soap or detergent and water or recommended glass cleaner solution.
- Make sure to dry off excess water.
- **DO NOT** use abrasive cleaning agents.

Refer to our Solar Comfort Cleaning Recommendations document for more information.

Maintenance of Hardware

- General periodic maintenance is required on all hardware supplied such as locks, hinges, catches, closers and the like.
- The external finish of hardware must be kept clean by removing any harmful residue (especially salt spray) from the surface using a non-abrasive cleaning agent.
- Internal mechanisms of locks, catches, etc. should be kept in good working order by applying a light spray of lubricant (WD40, RP7 or similar).
- **Care should be taken** during maintenance of internal mechanisms that any finished surface (e.g. paint etc.) is well protected to avoid damage.

Maintenance of Window and Door Rollers

- Remove the sliding panel of the product from the inside of the house. With the window or door partly open, lift the sliding panel up into the head while tilting the bottom of the panel towards you, out over the sill. Slide the panel downwards to remove it from the frame.
- Use a vacuum cleaner with a narrow nozzle to clean the track thoroughly.
- Use a soft rag and water mixed with mild detergent to wipe the track and rollers.
- It is essential that rollers are cleaned 3-4 times a year.

Maintenance of Insect and Safety Screens

- Clean screens 3-4 times a year.
- Add a small amount of mild detergent to a bucket of warm water.
- Remove the screen from the window.
- Hose the screen down thoroughly. Dip a soft nylon brush into the bucket of water and gently brush the screen.
- Hose down well.
- Allow the screen to dry before replacing in the window.

Maintenance of Stainless View™ and Ali-View™ Screens

- Stainless View™ and Ali-View™ screens should be cleaned at frequent intervals as indicated in the table below.
- It is important that non-abrasive mild detergent solution combined with warm water, and a clean, soft, non-abrasive cloth, are used for cleaning.
- Hand cleaning is recommended except for multi-storey buildings and large commercial projects where carefully controlled methods to loosen deposits of dirt and grime are required.
- It is essential to finish off the cleaning by thoroughly rinsing all surfaces to remove all residue.
- Fibre brushes may be used to loosen dirt and grime, but abrasive papers such as sandpaper or emery paper **MUST NOT** be used.









































































Recommended Maintenance Intervals

Type of Environment	Definition of Environment	Maximum Maintenance Intervals
Mild	Being rural, away from the coast and remote industry and urban activity.	6 Months
Moderate	Being mainly urban, inland and away from heavy industrial activity.	3 Months
Tropical / Severe	Being coastal/marine, subject to salt deposition and within 15km of the eastern coast or 10km of the western coast of Australia.	2-4 Weeks

Sliding Windows STANDARD SIZES

The availability of certain sizes and configurations is dependent on the design wind load requirement as per AS2047-2014. Check with your Tasman representative to confirm availability. Sliding Windows may be subject to local variation or regulatory requirements.

Available Single or Double Glazed (Signature version only)

STUD OPENING mm		670	910	1270	1630	1870	2230	2230	2470	2710	3070
FRAME SIZE mm		610	850	1210	1570	1810	2170	2170	2410	2650	3010
660	600	 XO0606	 XO0609	 XO0612	 XO0616	 XO0618	 XO0622	 XOX0622	 XOX0624	 XOX0627	 XOX0630
920	860	 XO0906	 XO0909	 XO0912	 XO0916	 XO0918	 XO0922	 XOX0922	 XOX0924	 XOX0927	 XOX0930
1090	1030	 XO1006	 XO1009	 XO1012	 XO1016	 XO1018	 XO1022	 XOX1022	 XOX1024	 XOX1027	 XOX1030
1260	1200	 XO1209	 XO1212	 XO1216	 XO1218	 XO1222	 XOX1222	 XOX1224	 XOX1227	 XOX1230	
1430	1370		 XO1412	 XO1416	 XO1418	 XO1422	 XOX1422	 XOX1424	 XOX1427	 XOX1430	
1520	1460		 XO1512	 XO1516	 XO1518	 XO1522	 XOX1522	 XOX1524	 XOX1527	 XOX1530	
1860	1800	 XO/O1809	 XO/O1812	 XO/OO1816	 XO/OO1818	 XO/OO1822	 XOX/OO1822	 XOX/OO1824	 XOX/OO1827	 XOX/OO1830	
2120	2060		 XO/O2112	 XO/OO2116	 XO/OO2118	 XO/OO2122	 XOX/OO2122	 XOX/OO2124	 XOX/OO2127	 XOX/OO2130	

Viewed from exterior: X = Sliding Panel, O = Fixed Panel

Arrow indicates sliding direction viewed from exterior











































































































Sliding Windows are also available in OX or OXXO configurations (minimum of 1810mm in width required)



Double Hung Windows STANDARD SIZES

The availability of certain sizes and configurations is dependent on the design wind load requirement as per AS2047-2014. Check with your Tasman representative to confirm availability. Double Hung Windows may be subject to local variation or regulatory requirements.





Available Single or Double Glazed (Signature version only)

STUD OPENING mm		670	910	1270	1630	1870	2230	2470	2710	3070
FRAME SIZE mm		610	850	1210	1570	1810	2170	2410	2650	3010
920	860	 D0906	 D0909	 D0912	 DY0916	 DY0918	 DYD0922	 DYD0924	 DYD0927	 DYD0930
1090	1030	 D1006	 D1009	 D1012	 DY1016	 DY1018	 DYD1022	 DYD1024	 DYD1027	 DYD1030
1260	1200	 D1206	 D1209	 D1212	 DY1216	 DY1218	 DYD1222	 DYD1224	 DYD1227	 DYD1230
1430	1370	 D1406	 D1409	 D1412	 DY1416	 DY1418	 DYD1422	 DYD1424	 DYD1427	 DYD1430
1520	1460	 D1506	 D1509	 D1512	 DY1516	 DY1518	 DYD1522	 DYD1524	 DYD1527	 DYD1530
1860	1800	 D1806	 D1809	 DY1812	 DY1816	 DY1818	 DYD1822	 DYD1824	 DYD1827	
1860	1800	 D/O1806	 D/O1809	 D/O1812	 DY/OO1816	 DY/OO1818	 DYD/OOO1822	 DYD/OOO1824	 DYD/OOO1827	 DYD/OOO1830
	600	 D/O1806	 D/O1809	 D/O1812	 DY/OO1816	 DY/OO1818	 DYD/OOO1822	 DYD/OOO1824	 DYD/OOO1827	 DYD/OOO1830
2120	2060	 D2106	 D2109	 DY2112	 DY2116	 DY2118	 DYD2122	 DYD2124	 DYD2127	
2120	2060	 D/O2106	 D/O2109	 D/O2112	 DY/OO2116	 DY/OO2118	 DYD/OOO2122	 DYD/OOO2124	 DYD/OOO2127	 DYD/OOO2130
	1460	 D/O2106	 D/O2109	 D/O2112	 DY/OO2116	 DY/OO2118	 DYD/OOO2122	 DYD/OOO2124	 DYD/OOO2127	 DYD/OOO2130
	600	 D/O2106	 D/O2109	 D/O2112	 DY/OO2116	 DY/OO2118	 DYD/OOO2122	 DYD/OOO2124	 DYD/OOO2127	 DYD/OOO2130

Awning Windows STANDARD SIZES

The availability of certain sizes and configurations is dependent on the design wind load requirement as per AS2047-2014. Check with your Tasman representative to confirm availability. Awning Windows may be subject to local variation or regulatory requirements.

 Available Single or Double Glazed

STUD OPENING mm		670	910	1270	1630	1870	2230	2470	2710	3070
FRAME SIZE mm		610	850	1210	1570	1810	2170	2410	2650	3010
660	600	 W0606	 W0609	 WF0612	 WF0616	 WF0618	 WFW0622	 WFW0624	 WFW0627	 WFW0630
920	860	 W0906	 W0909	 WF0912	 WF0916	 WF0918	 WFW0922	 WFW0924	 WFW0927	 WFW0930
1090	1030	 W1006	 W1009	 WF1012	 WF1016	 WF1018	 WFW1022	 WFW1024	 WFW1027	 WFW1030
1260	1200	 W1206	 W1209	 WF1212	 WF1216	 WF1218	 WFW1222	 WFW1224	 WFW1227	 WFW1230
1430	1370	 W1406	 W1409	 WF1412	 WF1416	 WF1418	 WFW1422	 WFW1424	 WFW1427	 WFW1430
1520	1460	 W1506	 W1509	 WF1512	 WF1516	 WF1518	 WFW1522	 WFW1524	 WFW1527	 WFW1530
1860	1800	 W/F1806	 W/F1809	 WF/F1812	 WF/FF1816	 WF/FF1818	 WFW/FFF1822	 WFW/FFF1824	 WFW/FFF1827	 WFW/FFF1830
	600	 W/F1806	 W/F1809	 WF/F1812	 WF/FF1816	 WF/FF1818	 WFW/FFF1822	 WFW/FFF1824	 WFW/FFF1827	 WFW/FFF1830
2120	1460	 W/F2106	 W/F2109	 WF/F2112	 WF/FF2116	 WF/FF2118	 WFW/FFF2122	 WFW/FFF2124	 WFW/FFF2127	 WFW/FFF2130
	600	 W/F2106	 W/F2109	 WF/F2112	 WF/FF2116	 WF/FF2118	 WFW/FFF2122	 WFW/FFF2124	 WFW/FFF2127	 WFW/FFF2130

Note: All Awning Window sashes come standard with a chain winder

Casement Windows STANDARD SIZES

The availability of certain sizes and configurations is dependent on the design wind load requirement as per AS2047-2014. Check with your Tasman representative to confirm availability. Casement Windows may be subject to local variation or regulatory requirements.

 Available Single or Double Glazed

STUD OPENING mm		670	910	1270	1630	1870	2230	2470
FRAME SIZE mm		610	850	1210	1570	1810	2170	2410
660	600	 C0606	 CF0609	 CF0612	 CFC0616	 CFC0618	 CFC0622	 CFC0624
	920	 C0906	 CF0909	 CF0912	 CFC0916	 CFC0918	 CFC0922	 CFC0924
1090	1030	 C1006	 CF1009	 CF1012	 CFC1016	 CFC1018	 CFC1022	 CFC1024
1260	1200	 C1206	 CF1209	 CF1212	 CFC1216	 CFC1218	 CFC1222	 CFC1224
1430	1370	 C1406	 CF1409	 CF1412	 CFC1416	 CFC1418	 CFC1422	 CFC1424
1520	1460	 C1506	 CF1509	 CF1512	 CFC1516	 CFC1518	 CFC1522	 CFC1524
1860	1800	 C/F1806	 CF/FF1809	 CF/FF1812	 CFC/FFF1816	 CFC/FFF1818	 CFC/FFF1822	 CFC/FFF1824
	600	 C/F1806	 CF/FF1809	 CF/FF1812	 CFC/FFF1816	 CFC/FFF1818	 CFC/FFF1822	 CFC/FFF1824
2120	1460	 C/F2106	 CF/FF2109	 CF/FF2112	 CFC/FFF2116	 CFC/FFF2118	 CFC/FFF2122	 CFC/FFF2124
	600	 C/F2106	 CF/FF2109	 CF/FF2112	 CFC/FFF2116	 CFC/FFF2118	 CFC/FFF2122	 CFC/FFF2124

Louvre Windows STANDARD SIZES

The availability of certain sizes and configurations is dependent on the design wind load requirement as per AS2047-2014. Check with your Tasman representative to confirm availability. Louvre Windows may be subject to local variation or regulatory requirements.

Louvre Information

- Using standard galleries (No extension pieces)
- L = Single Louvre Bay

Note:

- Blades can be glass, timber or aluminium
- Handle on LH side viewed from inside as standard

Frame Widths (mm)	
L	610
L	850
LL	1210
LL	1570
LL	1810
LLL	2170
LLL	2410
LLL	2650

152mm Blades Stud Opening (mm)	152mm Blades Frame Height (mm)	102mm Blades Stud Opening (mm)	102mm Blades Frame Height (mm)	Number of Blades
422	362	N/A	N/A	2
562	502	409	349	3
701	641	498	438	4
841	781	587	527	5
981	921	676	616	6
1120	1060	765	705	7
1260	1200	854	794	8
1400	1340	943	883	9
1539	1479	1031	971	10
1679	1619	1120	1060	11
1819	1759	1209	1149	12
1959	1899	1298	1238	13
2098	2038	1387	1327	14
2238	2178	1476	1416	15
2378	2318	1565	1505	16
2517	2457	1654	1594	17
2657	2597	1743	1683	18
2797	2737	1832	1772	19
2936	2876	1920	1860	20
N/A	N/A	2009	1949	21
N/A	N/A	2098	2038	22
N/A	N/A	2187	2127	23
N/A	N/A	2276	2216	24
N/A	N/A	2365	2305	25
N/A	N/A	2454	2394	26
N/A	N/A	2543	2483	27
N/A	N/A	2632	2572	28
N/A	N/A	2721	2661	29
N/A	N/A	2809	2749	30
N/A	N/A	2898	2838	31
N/A	N/A	2987	2927	32

Bi-fold Windows STANDARD SIZES

The availability of certain sizes and configurations is dependent on the design wind load requirement as per AS2047-2014. Check with your Tasman representative to confirm availability. Bi-fold Windows may be subject to local variation or regulatory requirements.

Available Single or Double Glazed

STUD OPENING mm		940	1270	1630	1870	2230	2470	2710	3070	2710	3070	3430	3650
FRAME SIZE mm		880	1210	1570	1810	2170	2410	2650	3010	2650	3010	3370	3590
		2 LITE			4 LITE				6 LITE				
660	600												
920	860												
1090	1030												
1260	1200												
1430	1370												
1520	1460												
	220												
	202												
	440												
	422												
	404												
	660												
	642												
	624												
	606												

Bi-Fold Numbering

eg: **422** (exterior view from left to right)

4	2	2
Total panels	No of panels opening to left	No of panels opening to right

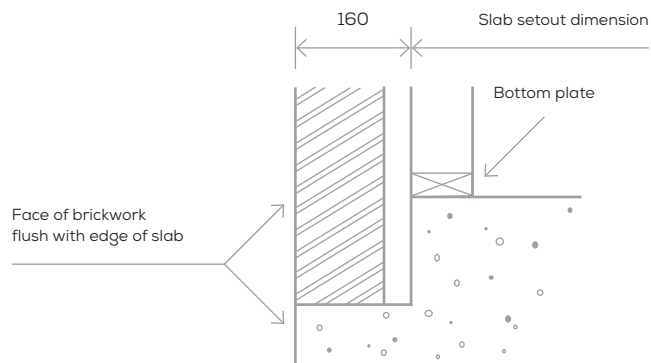
Bay Windows STANDARD SIZES

The availability of certain sizes and configurations is dependent on the design wind load requirement as per AS2047-2014. Check with your Tasman representative to confirm availability. Bay Windows may be subject to local variation or regulatory requirements.

⊕ Available Single or Double Glazed

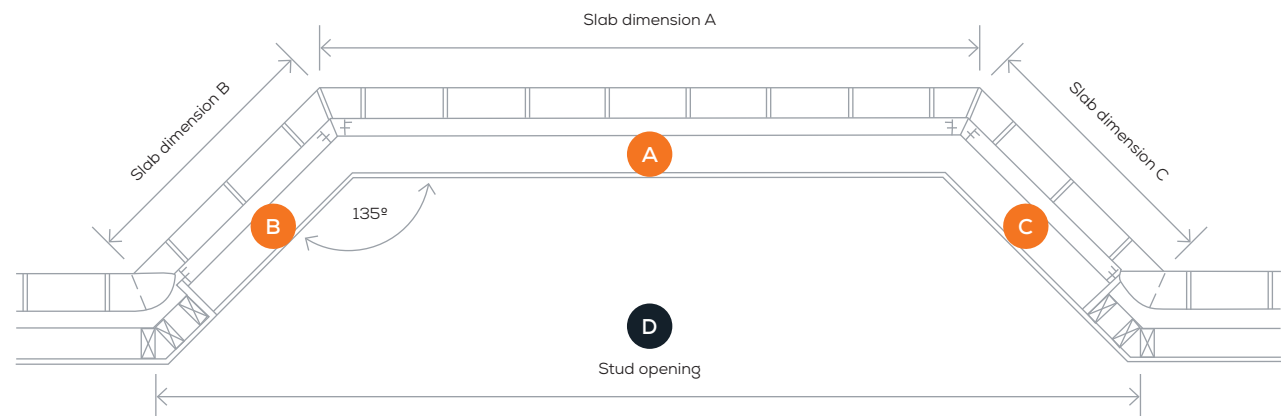
90° Bay Window Setout

Width of window	A	=	Slab dimension A – 300mm
Width of window	B	=	Slab dimension B – 150mm
Width of window	C	=	Slab dimension C – 150mm



135° Bay Window Setout









Width of window	A	=	Slab dimension A – 140mm
Width of window	B	=	Slab dimension B – 160mm
Width of window	C	=	Slab dimension C – 160mm
Stud opening	D	=	$(2 \times \text{Slab dimension B} \times 0.7071) + \text{Slab dimension A} - 130\text{mm}$ where B and C are equal
Depth of Bay window	E	=	Slab dimension B or C x 0.7071



Sliding Doors STANDARD SIZES

The availability of certain sizes and configurations is dependent on the design wind load requirement as per AS2047-2014. Check with your Tasman representative to confirm availability. Sliding Doors may be subject to local variation or regulatory requirements.

+ Available Single or Double Glazed (Signature & Commercial versions only)

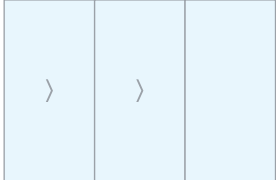

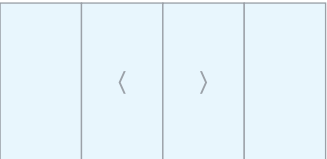
STUD OPENING mm		1630	1870	2230	2470	
FRAME SIZE mm		1570	1810	2170	2410	
2130	2100					Also available in FS configuration 
		SF2116	SF2118	SF2122	SF2124	
2430	2400					
		SF2416	SF2418	SF2422	SF2424	
STUD OPENING mm		2388	2748	3288	3648	
FRAME SIZE mm		2328	2688	3228	3588	
2130	2100					Also available in FSFL configuration 
		FSFR2123	FSFR2127	FSFR2132	FSFR2136	
2430	2400					
		FSFR2423	FSFR2427	FSFR2432	FSFR2436	

Viewed from exterior: S = Sliding Panel, F = Fixed Panel Arrow indicates sliding direction viewed from exterior


Sliding Doors STANDARD SIZES

The availability of certain sizes and configurations is dependent on the design wind load requirement as per AS2047-2014. Check with your Tasman representative to confirm availability. Sliding Doors may be subject to local variation or regulatory requirements.

Available Single or Double Glazed (Signature & Commercial versions only)

STUD OPENING mm		2388	2748	3288	3648
FRAME SIZE mm		2328	2688	3228	3588
2130	2100	 SSF2123	 SSF2127	 SSF2132	 SSF2136
	2430	 SSF2423	 SSF2427	 SSF2432	 SSF2436
STUD OPENING mm		3164	3644	4364	4844
FRAME SIZE mm		3104	3584	4304	4784
2130	2100	 FSSF2131	 FSSF2136	 FSSF2143	 FSSF2148
	2430	 FSSF2431	 FSSF2436	 FSSF2443	 FSSF2448

Also available in FSS configuration

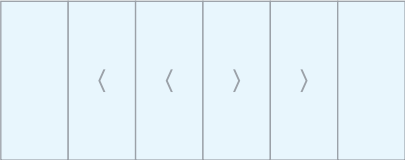
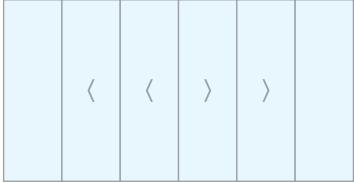
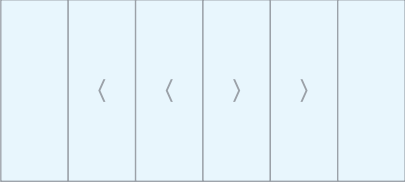


Viewed from exterior: S = Sliding Panel, F = Fixed Panel Arrow indicates sliding direction viewed from exterior

Sliding Doors STANDARD SIZES

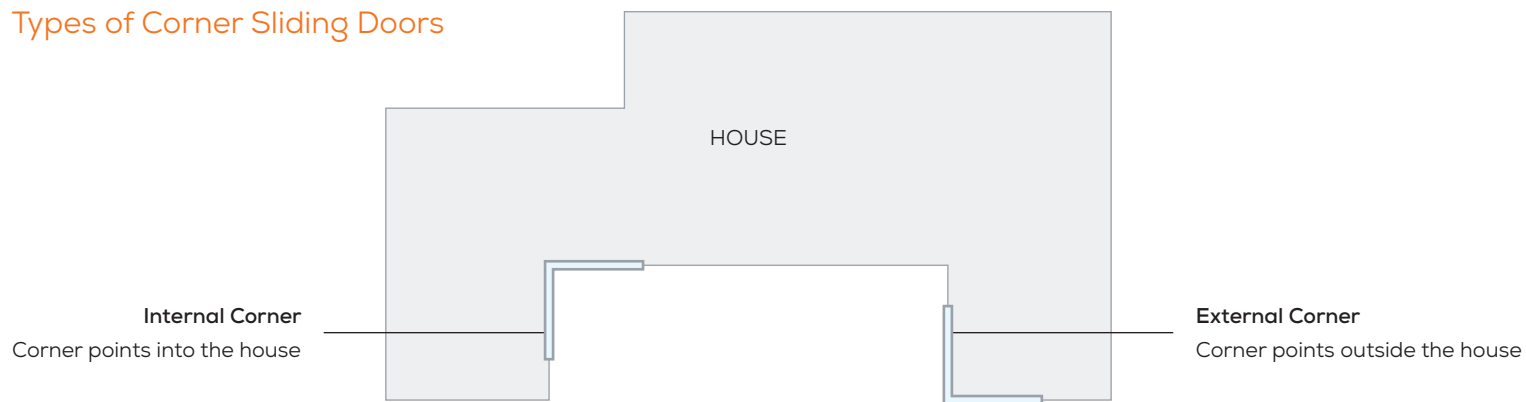
The availability of certain sizes and configurations is dependent on the design wind load requirement as per AS2047-2014. Check with your Tasman representative to confirm availability. Sliding Doors may be subject to local variation or regulatory requirements.

⊕ Available Single or Double Glazed (Signature & Commercial versions only)

STUD OPENING mm		4686	5406	6306
FRAME SIZE mm		4626	5346	6246
2130	2100			
		FSSSSF2146	FSSSSF2153	FSSSSF2162
2430	2400			
		FSSSSF2446	FSSSSF2453	FSSSSF2462

Viewed from exterior: **S** = Sliding Panel, **F** = Fixed Panel Arrow indicates sliding direction viewed from exterior

Types of Corner Sliding Doors



Bi-fold Doors STANDARD SIZES

The availability of certain sizes and configurations is dependent on the design wind load requirement as per AS2047-2014. Check with your Tasman representative to confirm availability. Bi-fold Doors may be subject to local variation or regulatory requirements.

Available Single or Double Glazed

STUD OPENING mm	1390	1630	1750	1870	2390	2590	2750	3170	3430	3170	3650	4270	4370	4850	5110
FRAME SIZE mm	1330	1570	1690	1810	2330	2530	2690	3110	3370	3110	3590	4210	4310	4790	5050
	2 LITE			3 LITE			4 LITE			5 LITE			6 LITE		
2140															
2440															
220															
202															
330															
303															
440															
431															
422															
413															
404															
550															
505															
660															
651															
642															
633															
624															
606															
615															

Bi-Fold Numbering

eg: **321** (exterior view from left to right)

3	2	1
Total panels	No of panels opening to left	No of panels opening to right

Note: 2 Lite, 4 Lite and 6 Lite configurations do not have an access door panel

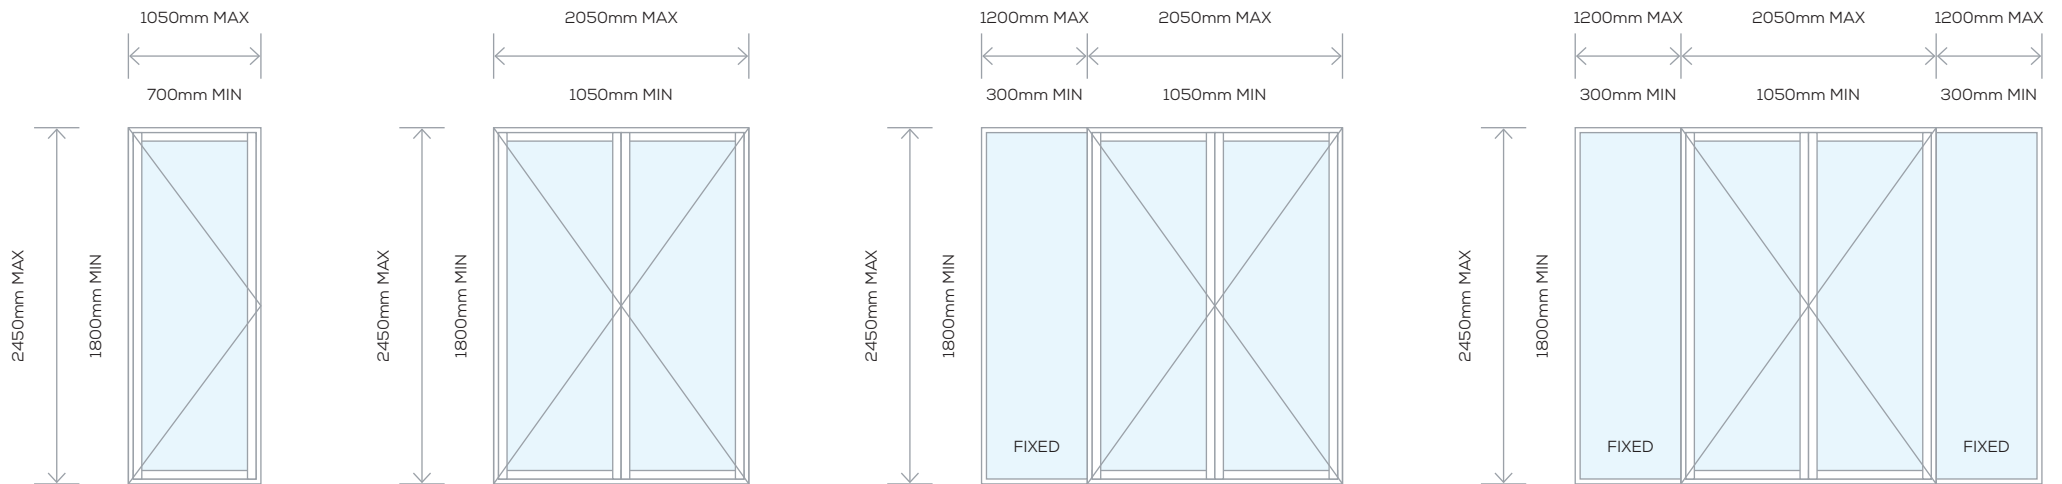
Hinged Doors STANDARD SIZES

The availability of certain sizes and configurations is dependent on the design wind load requirement as per AS2047-2014. Check with your Tasman representative to confirm availability. Hinged Doors may be subject to local variation or regulatory requirements.

+ Available Single or Double Glazed

Hinged Door Information

- Standard door leaf widths are 620mm, 720mm, 820mm
- Maximum leaf size 870mm
- All doors to be supplied with sills
- Operable windows are available as side lites if required
- Hi lites are available subject to confirmation of structural performance



7 Year Guarantee TERMS & CONDITIONS

Tasman Windows & Doors is a member of the Australian Window Association and as such conforms to an Industry Code of Conduct designed to protect consumers.

Subject to the conditions and limitations below Tasman Windows & Doors guarantees its products against defects arising from faulty workmanship or materials for seven years from the date of delivery or installation.

For the purpose of this warranty "the product" can mean a window, door, insect screen, safety screen, Stainless View™ screen, Ali-View™ screen, shower screen, splashback, mirror, wardrobe door or shelving product ordinarily manufactured and sold by Bradnam's Windows and Doors Pty Ltd.

Conditions and Limitations

- 1 The product is installed in accordance with the relevant Australian Standards and building practice. Unless otherwise specifically confirmed in writing, Tasman Windows and Doors Pty Ltd accepts no responsibility for waterproofing and/or re-sealing of penetrations and such remains the responsibility of others.
- 2 The product has been maintained according to Tasman Windows and Doors Pty Ltd maintenance recommendations and has not been subject to misuse, physical abuse, or neglect.
- 3 In respect of window and door products, this guarantee is void if Tasman Windows and Doors Pty Ltd insect screens, safety screens, Stainless View™ screens and Ali-View™ screens have not been manufactured and fitted by Tasman Windows and Doors Pty Ltd installers or personnel nominated by Tasman Windows and Doors Pty Ltd.
- 4 Manufacturing standards and tolerances are not deemed defects, nor are industry variations in the colour of aluminium componentry and glass.
- 5 Tasman Windows and Doors Pty Ltd accepts no responsibility for glass breakage (except for faulty workmanship or materials). Wire reinforced glass, toughened glass, float glass, laminated glass, mirror glass, framed mirror glass and painted glass is guaranteed against defects and degradation (e.g. desilvering) for one (1) year.
- 6 Moving parts, where applicable, which wear out as part of normal use are guaranteed for one (1) year.
- 7 This guarantee is limited to the repair or replacement of the faulty product at the company's discretion but does not extend to the installation or refurbishing of a replacement product or any other consequential or indirect damage incurred as a result of the defect. Only repairs carried out by Tasman Windows and Doors Pty Ltd personnel or authorised Tasman Windows and Doors Pty Ltd agents are covered by this guarantee.
- 8 This guarantee is in addition to all other rights and remedies in respect of this product to which you are entitled under the *Competition and Consumer Act 2010 (Cth)*.



Warranty Claims

Claims under this guarantee must be made within one month of the defect arising in the product. Other than as provided by law Tasman Windows and Doors Pty Ltd will repair or replace the product to the extent that it is functionally equivalent to the original product supplied.

Copies of documentation showing the purchase date of the product should be included with your written claim and forwarded to the nearest Tasman Windows and Doors Pty Ltd office. All warranty claims will initially require a deposit to be paid. After inspection by Tasman Windows and Doors Pty Ltd personnel or authorised agents, the customer will be advised if the claim is covered under the warranty. If the claim is under warranty the deposit will be refunded and the product will be repaired or replaced by Tasman Windows and Doors Pty Ltd. Otherwise, upon the customer's request, Tasman Windows and Doors Pty Ltd will provide a quote to rectify the problem.

For more information contact:
Tasman Windows & Doors

**7 McPherson Cct,
Pambula NSW 2549**

PH: (02) 6495 6686

www.tasmanwindows.com

Email: sales@tasmanwindows.com

WINDOWS & DOORS

INSECT & SECURITY SCREENS



Australian Owned & Made

Bradnam's products are proudly made in Australia and designed specifically to meet all Australian conditions.

Product availability, pricing, features, options, sizes, configurations and performance are subject to regional variations, design requirements and building codes.

Images are for illustration purposes only and may not accurately represent the product. Bradnam's Windows & Doors reserves the right to change, alter or delete any aspect of this product without notice.

We recommend visiting a Bradnam's showroom before ordering to view colour swatches, glass samples and actual products.



Bradnam's Windows and Doors . QBCC Act lic 58885
© Bradnam's Windows and Doors . v10 Aug 2020